

Route 66 2701

Acoustic



Ivory
010



Linen
030



Silver
040



Mist
041



Sage
020



Khaki
031



Eucalyptus
050

Route 66 2701

Acoustic

Specifications

Content

20% post-consumer recycled polyester
50% pre-consumer recycled polyester
30% polypropylene

Weight

13.9 ± 1.0 oz./lin. yd.

Width

66" min. useable

Repeat

none

Cleaning Code

W-S

Performance



Colorfastness to Light (AATCC 16 Option 3)

Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)

250 lbf min. warp and 150 lbf min. fill




Flammability (ASTM E84)

Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

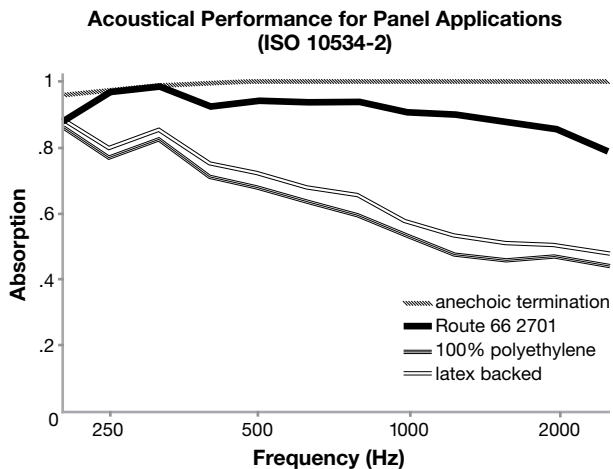

NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination

.90

Miscellaneous

Colors may vary slightly between dye lots.

This is a directional fabric.

Application testing of this product is recommended.



Guilford of Maine®

Visit guilfordofmaine.com for complete specs and samples.



American Micro Industries, Inc.
Attn: SoundproofCow.com
440 Ramsey Avenue
Chambersburg, PA 17201

sales@soundproofcow.com

Toll Free: 1-866-949-9COW
(1-866-949-9269)

Local: 717-262-7206

Fax: 717-261-1790

*ACT® registered certification marks.