

Studio 54 2966

Acoustic



Disco
7030



Shimmer
7041



Glam
7040



Hustle
7032



Glitter
7031



Jagger
7011



Warhol
7042



Ross
7044



Stayin' Alive
7010



Inferno
7012



Flashy
7043



Summer
7021



Gloria
7020

Studio 54 2966

Acoustic

Specifications

Content
100% polypropylene

Weight
12.8 ± 1.0 oz./lin. yd.

Width
66" min. useable


Repeat
.1" vertical, none horizontal


Treatment
polyester binder


Cleaning Code

W-S. May be cleaned with a 4:1 water-to-bleach solution. Rinse well after cleaning.

Performance

 **Colorfastness to Light (AATCC 16 Option 3)**
Grade 4 min. at 40 hours


 **Colorfastness to Crocking (AATCC 8)**
Grade 4 min. dry & Grade 3 min. wet

 **Breaking Strength (ASTM D5034)**
100 lbf min. warp and 250 lbf min. fill

 *** Flammability (ASTM E84)**
Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

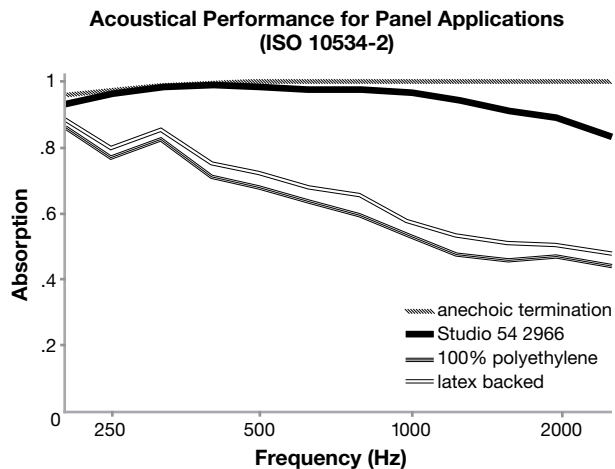

NRC of anechoic termination
1.00

NRC of fabric in front of anechoic termination
.95

Miscellaneous

Colors may vary slightly between dye lots.

This is a directional fabric.

Application testing of this product is recommended.

Variation in texture and luster, due to the manufacturing process, is to be expected and is part of the inherent beauty of Studio 54.

 **Guilford of Maine®**

Visit guilfordofmaine.com for complete specs and samples.

soundproofCOW.com
there's something about the cow. 

American Micro Industries, Inc.
Attn: SoundproofCow.com
440 Ramsey Avenue
Chambersburg, PA 17201

sales@soundproofcow.com

Toll Free: 1-866-949-9COW
(1-866-949-9269)
Local: 717-262-7206
Fax: 717-261-1790

*ACT® registered certification marks.