Anchorage 2335

Birch
2129

Vanilla
2130

Angora
2035

Sunshine
2082

Goose
2049

Asteroid
2053

Quarry Blue
2026

Lapis
2094

Fossil
2093

Onyx
2016

soundproofcow.com
there's something about the cow.

Anchorage 2335

Specifications

Content
35% post-consumer recycled polyester
65% pre-consumer recycled polyester

Weight
15.0 ± 1.0 oz./lin. yd.

Width
66" min. useable

Repeat
none

Cleaning Code

W-S

Performance

Colorfastness to Light (AATCC 16 Option 3)
Grade 4 min. at 40 hours

**Colorfastness to Crocking (AATCC 8)**
Grade 4 min. dry & Grade 3 min. wet

Breaking Strength (ASTM D5034)
275 lbf min. warp and fill

Flammability (ASTM E84) *
Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)
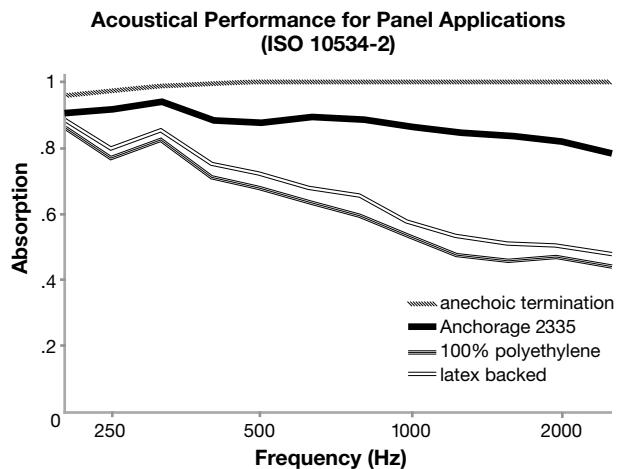
NRC of anechoic termination
1.00

NRC of fabric in front of anechoic termination
.85

Miscellaneous

Colors may vary slightly between dye lots.
This is a directional fabric.
Application testing of this product is recommended.
Also available in 54" width (Open House 2334).

Guilford of Maine®

Visit guilfordofmaine.com for complete specs and samples.

soundproofcow.com
there's something about the cow.

American Micro Industries, Inc.
Attn: SoundproofCow.com
440 Ramsey Avenue
Chambersburg, PA 17201

sales@soundproofcow.com

Toll Free: 1-866-949-9COW
              (1-866-949-9269)
Local: 717-262-7206
Fax: 717-261-1790