

# Otto 2670

# Otto 2670



**Crystal**  
7040



**Gold**  
7020



**Chive**  
7021



**Platinum**  
7010



**Straw**  
7013



**Patina**  
7032



**Misty**  
7011



**Pebble**  
7012



**Slate**  
7030

## Specifications


Content	31% post-consumer recycled polyester 34% pre-consumer recycled polyester 35% polypropylene
Weight	13.5 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none
Treatment	polyester binder

## Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

## Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

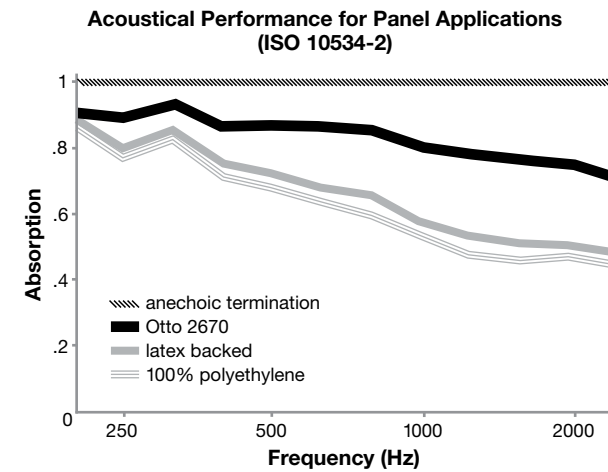

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.85

## Performance

- Colorfastness to Light (AATCC 16.3 Option 3)  
**Grade 4 min. at 40 hours**
- Colorfastness to Crocking (AATCC 8)  
**Grade 4 min. dry & Grade 3 min. wet**
- Breaking Strength (ASTM D5034)  
**200 lbf min. warp and 175 lbf min. fill**
- Flammability (ASTM E84)  
**Class I or A**

## Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit [guilfordofmaine.com](http://guilfordofmaine.com) for samples.

\*Certification Marks owned by the Association for Contract Textiles, Inc.