

Studio 54 2966

Studio 54 2966

Specifications

Content	100% polypropylene
Weight	12.8 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	.1" vertical none horizontal
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

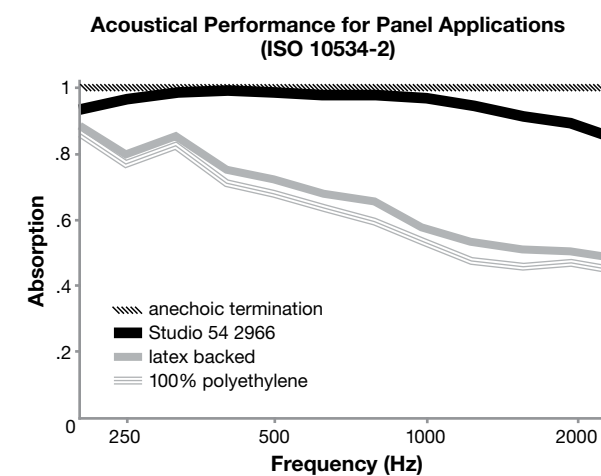

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

- Colorfastness to Light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours
- Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet
- Breaking Strength (ASTM D5034)
100 lbf min. warp and 250 lbf min. fill
- Flammability (ASTM E84)
Class I or A

Miscellaneous

Proudly woven in North America supporting our local communities.

Variation in texture and luster, due to the manufacturing process, is to be expected and is part of the inherent beauty of Studio 54.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.

*Certification Marks owned by the Association for Contract Textiles, Inc.



Shimmer
7041



Disco
7030



Hustle
7032



Stayin' Alive
7010



Ross
7044




Glitter
7031




Jagger
7011



Warhol
7042




Inferno
7012



Glam
7040



Flashy
7043



Summer
7021



Gloria
7020