




Resilmount™ Isolation Hanger

Resilmount™ Isolation Hanger is specifically designed for the support and acoustical isolation of internal suspended ceiling systems. Installed between the hanger and the ceiling system, it provides acoustical isolation of suspended ceilings. Rubber mounts differ from spring mounts in that the natural frequency is a function, not only of the deflection, but also of the rubber hardness. The noise absorption properties of the Resilmount™ Isolation Hanger allow it to deflect 3/16" when loaded up to 200 lbs, in accordance with American Standards, which provides optimal isolation of transferred noise.

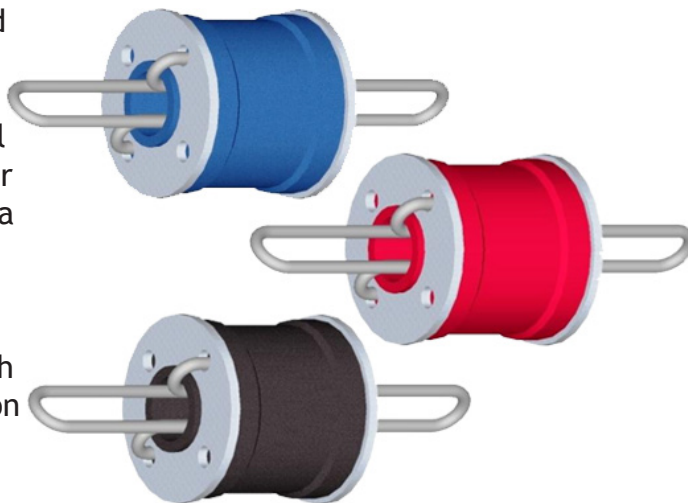

- ◇ Easily works with all hanger wire
- ◇ Easy installation into new or existing ceiling systems
- ◇ Meets all standards and guidelines
- ◇ Does not reduce the load capacity of the ceiling system
- ◇ Suitably isolates the ceiling system from the structure to reduce structure-borne noise
- ◇ Elastomer Type: Natural Rubber
- ◇ Shore A Hardness: 65
- ◇ Load capacity: 65 - 200 Lbs

ADDRESS

Soundproofcow
440 Ramsey Avenue
Chambersburg, PA 17201

PHONE

P: 1-866-949-9COW
F: (717)261-1790

WEB

www.soundproofcow.com