
Panel | Acoustic

Felt 9900

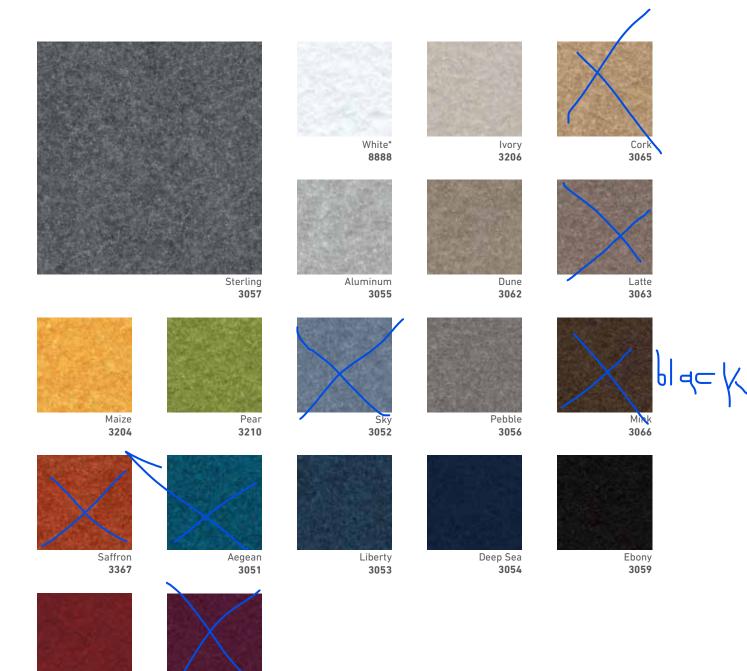

Cherry 3362

3049

Specifications

Felt 9900

Content	80% polyester 20% post-consumer recycled polyester
Weight	10.2 ± 1.0 oz./lin. yd
Width	64" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.
- * Light fabric are subject to transparency issues depending on lighting intensity and internal structure. Application testing of this product is recommended.

Proudly woven in North America supporting our local communities.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASTM D5U34)
250 lbf min. warp and 125 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

99%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.

