

Galaxy 9226

PANEL | ACOUSTIC

PANEL | ACOUSTIC

Galaxy 9226

Specifications


Content	40% pre-consumer recycled polyester 60% polyester
Weight	16.0 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.


Acoustical Performance


The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

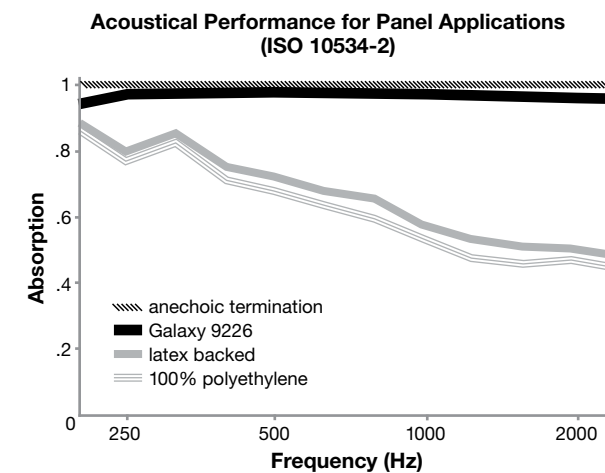



NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

-  Colorfastness to Light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours

-  Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

-  Breaking Strength (ASTM D5034)
350 lbf min. warp and 250 lbf min. fill

-  Flammability (ASTM E84)
Class I or A

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.

 This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.



Fog
606




Clamshell
587



Wrought Iron
1156



Gobi
585



Sundew
1155



Laurel
1211




Blueberry
1218



Mist
604



Desert Sand
605



Lacquer
1220